

PDS II

Programmable Dispensing System




Model: PDSII (Customized solutions)

- Flow Rate: 0.2 μ L/min~12L/min
- Dispensing volume range: 0.1-9999.99mL
- Dispensing time range: 0.5-9999.99s
- Pause time range: 0.5-9999.99s
- Repeat number range: 1-9999, 0 means unlimited.
- Volume setting resolution: 0.01ml
- Time setting resolution: 0.01sec
- Back suction angle: 0-360°

Product Instruction

1. 7 inch touch screen control, easy and convenient operation.
2. One controller can control maximum 8 pump units.
3. Support both transferring and dispensing function.
4. Each unit working with same or different parameters.
5. Pump units can be separately or integrated.
6. Different pump units can fit for same or different pump heads.
7. Pump can be controlled with touch screen, foot switch, switch signal and communication.

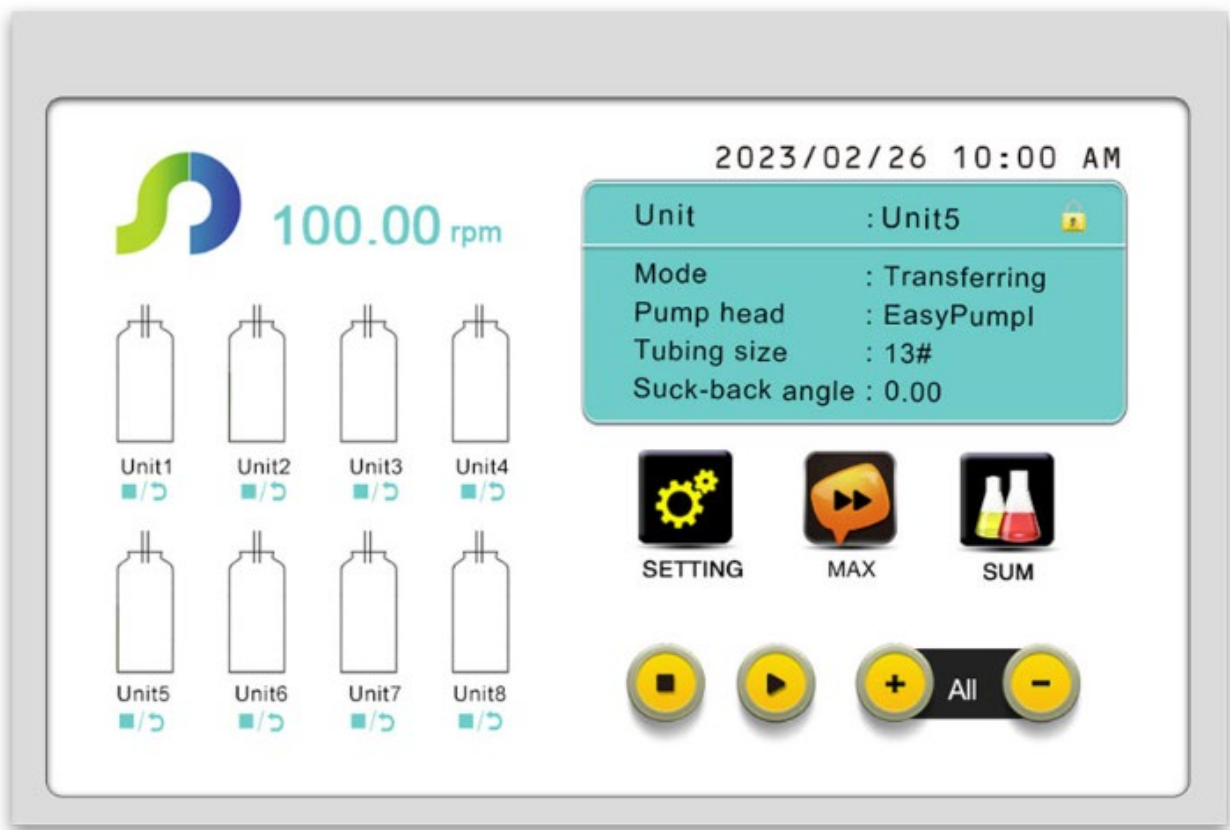

Pump Head



EasyPump Series



AMC Series



HandyPump Series



KT15



UD15



MiniPump



MicroPump



DZ25-3L





DZ25-6L



YZ35 Series

Function & Features

1. Two working modes: continuous transferring and dispensing.

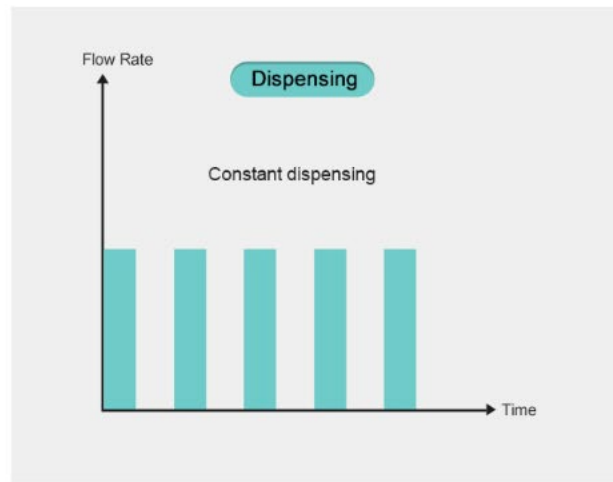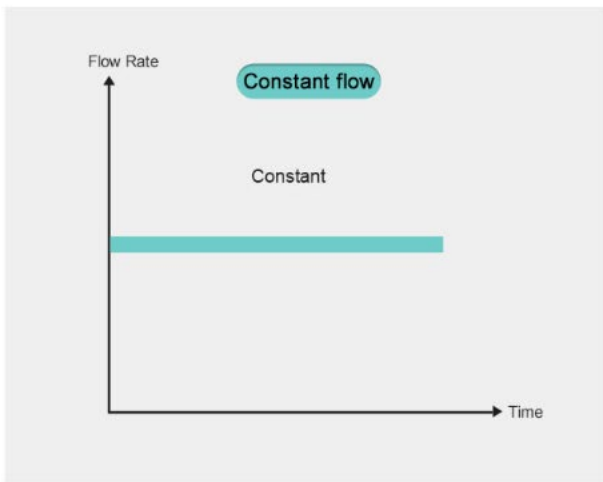

Setting interface

Parameter setting

Unit1

Pump head: EasyPump I ▼ Tubing size: 13# ▼ Back suction angle: 0.00 ↻

Transferring


Interval: 0.00 sec Flow rate: 7.00 mL/min Speed: 100.00 rpm

Dispensing

Interval: 0.00 sec Groups: 1 Repeats: 1

Volume(mL): 0.10 Run time(s): 0.50 Stop time(s): 0.50 CAL OK


2. Each unit working independently, can fill same or different volume.

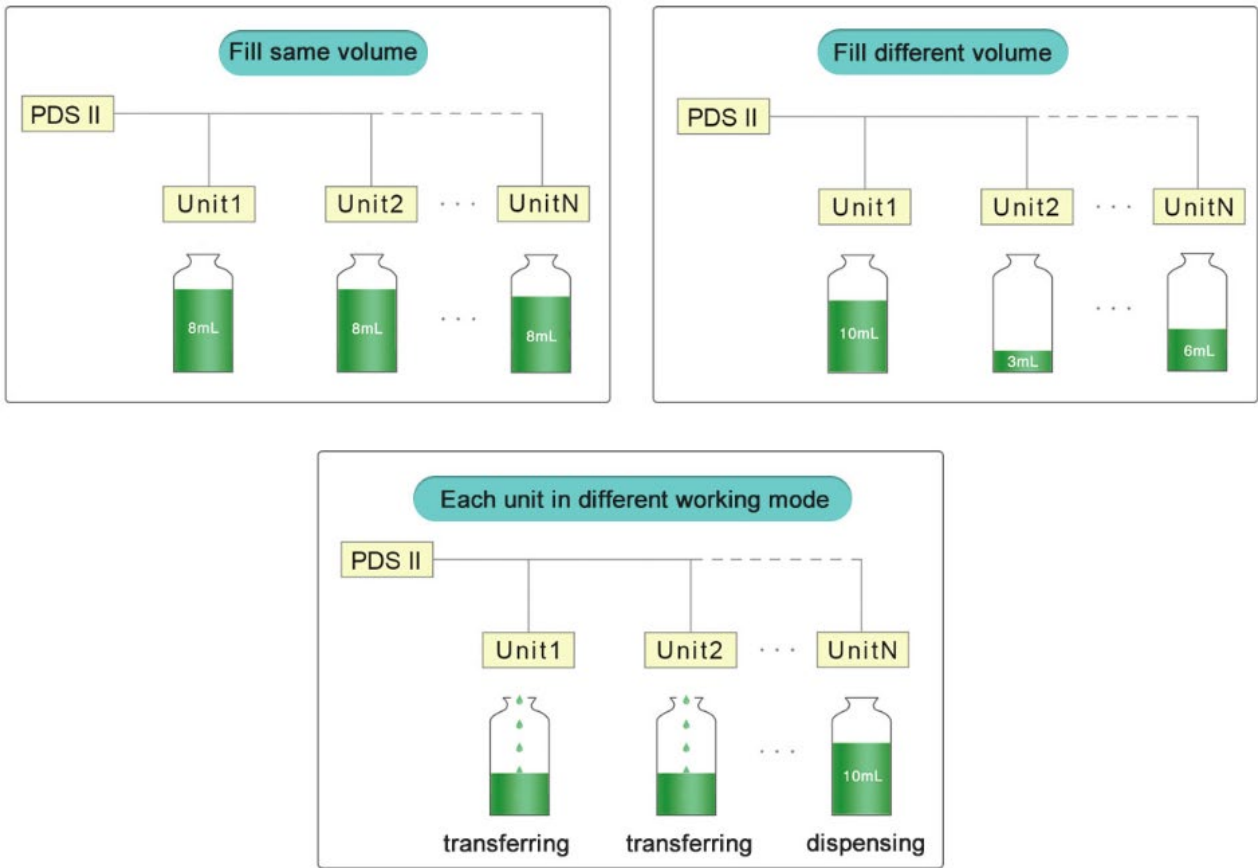


3. One controller can control different pump head (Max. 8 Pump Units).



4. Support intelligent calibration and online adjusting function, ensure the flow rate and dispensing accuracy.

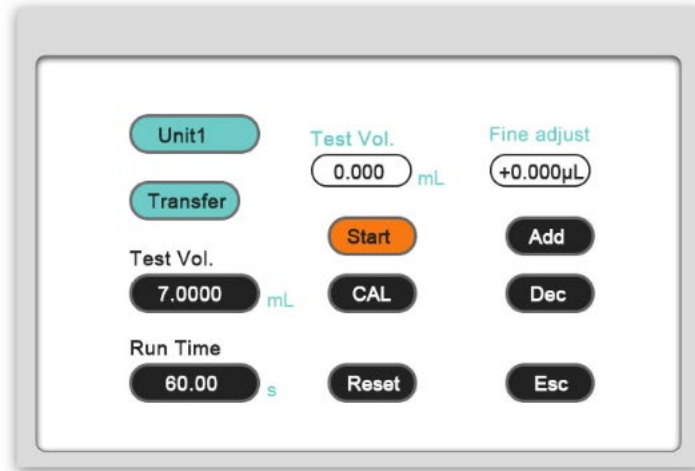


5. Store function: Can store 5 groups parameters, and easy to recall it.

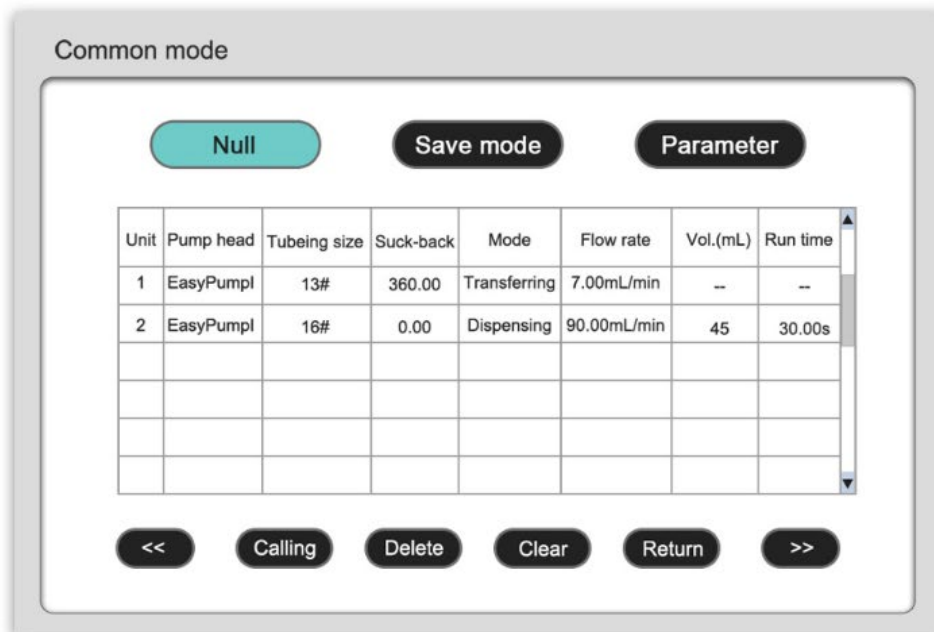

6. Support RS232/RS485 communication; support external control start/stop; support missing bottle stop filling function.

7. The pump units can be integrated or split type.

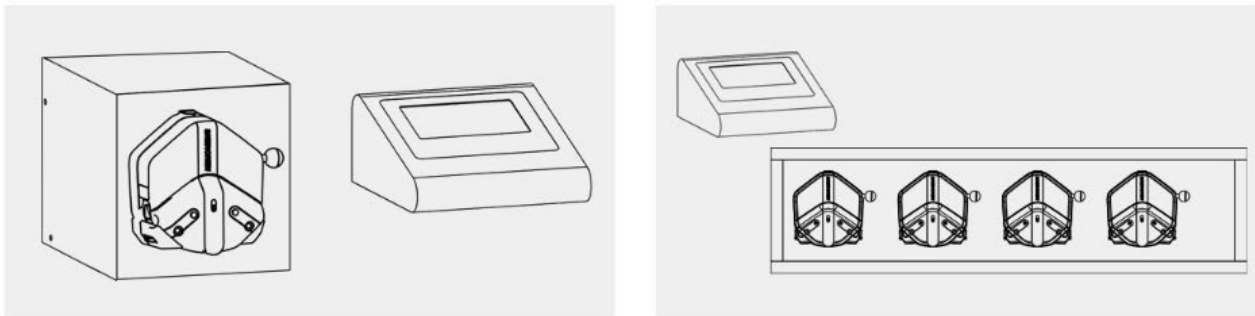

Specification

Dispensing volume range	0.1-9999.99ml
Dispensing time range	0.5-9999.99s
Pause time range	0.5-9999.99s
Repeat number range	1-9999, 0 means unlimited.
Volume resolution	0.01mL
Time resolution	0.01s
Back suction angle	0-360°
Store	5 parameter programs can be stored and easily recalled
External control method	Passive switch signal: Foot pedal; Active switch signal: Universal 5-24V
Communication method	RS232/RS485, supports Modbus protocol (RTU mode)
Pump unit power supply	AC 220V±10% 50Hz/60Hz (Standard); AC 110V±10% 50Hz/60Hz (Optional)
Controller power supply	5VDC/2A adapter (standard)
Temperature	0-40°C
Relative humidity	<80%
IP rate	IP31